

Device features

-

The packaging variant optimized for OEM's is environmentally friendly, cost-optimized and facilitates handling.

- Mobile hydraulics
- Transport vehicles
- Conveyor vehicles
- Commercial vehicles
- Automotive technology
- Brake systems
- Oil pressure
- Test equipment and technology
- Gearbox control



SCP03 pressure sensor

Technical data

SCP03-	004R	010R	010R	025R
Pressure range -1 ... bar	3	9	15	24
P _n relative (-14.5 ... psi)	(43,5)	(130)	(218)	(348)

SCP03-	004	010	016	025	035	040	060	100	250	400	500	600	1000
Pressure range	4	10	16	25	35	40	60	100	250	400	500	600	1000
P _n relative 0 ... bar / (psi)	(58)	(145)	(232)	(363)	(500)	(580)	(870)	(1450)	(3626)	(5800)	(7300)	(8702)	(14,503)
Overload pressure P _{max} DIN EN 60770-1 (bar) relative	2 x P _n												
Burst pressure P _{burst} DIN EN 60770-1 (bar) relative	3 x P _n												

SCP03-	0150P	0250P	1000P	3000P	5000P	9000P
Pressure range	150	250	1000	3000	5000	9000
P _n relative 0... (psi)						
Overload pressure* P _{max}	2 x P _n					
Burst pressure** P _{burst}	3 x P _n					

General		
Response time	≤1 ms	
Load change	> 100 million	
Material Housing	EN/DIN 1.4301	
Material Electr. Connector	PBT-GF30 black	
Weight	Approx. 80 g	
Accuracy parameter		
Non-linearity + Hysteresis + Repeatability	≤0.3 %FS	
Long-term stability	≤1.0 %FS / year	
Overall Accuracy		
	< 10 bar (145 psi)	≥ 10 bar (145 psi)
@ 25°C	≤ 0.5 %FS	≤ 0.5 %FS
@ 0°C...+85°C	≤ 2 %FS	≤ 1 %FS

Ambient conditions	
Media temperature	-40...+125 °C / (-40...257°F)
Operation / Ambient temperature	-40...+105 °C / (-40...221°F)
Storage temperature	-40...+125 °C / (-40...257°F)
Vibration resistance	IEC 60068-2-6: 20 g
Shock resistance	IEC 60068-2-27: 1000 g
Conformity	
CE	EN 61326-1 EN61326-3-1
RoHs	Yes
MTTFd	> 100 years

Process connection	Seal	Wetted parts
G1/4A BSPP; DIN 3852 T11, Form E	DIN 3869-14-FKM	EN/DIN 1.4404 / FKM
SAE-4: 7/16-20 UNF O-ring	FKM	EN/DIN 1.4404 / FKM
SAE 6: 9/16-18 UNF O-ring	FKM	EN/DIN 1.4404 / FKM
G1/4 DIN ISO 228-1 O-ring	FKM	EN/DIN 1.4404 / FKM
1/4 NPT		EN/DIN 1.4404



SCP03 pressure sensor

Pin assignment



Output signal	(2 wire) 4...20 mA	0...20 mA 4...20 mA	0.5...4.5 V 0...5 V	1...6 V 0...10 V	0.5...4.5 V ratio.
Supply Voltage V ₊	10...32 VDC	12...32 VDC	8...32 VDC	12...32 VDC	5 V ±10%
Load _{max}	≤ (V ₊ - 10V) / 20 mA [kΩ]		4.7 [kΩ]		
Overvoltage	50 VDC				
Short circuit	Yes				
Rever polarity	Yes				
Signal on GND / V ₊	Yes				

M12x1 4-pole


Pin 1	V_+				
Pin 2	P-Signal				
Pin 3	n.c.	0 V / GND			
Pin 4	n.c.	n.c.			

IP 67

DIN EN 175301-803 Form A 4-pole (old 43650)

Pin 1	P-Signal	
Pin 2	n.c	0 V / GND
Pin 3	V ₊	
Pin 4 / GND	n.c	

IP 65



AMP Superseal 1.5

Pin 1	P-Signal	0 V / GND
Pin 2	n.c	P-Signal
Pin 3	V ₊	

IP 65



DT04-4P

Pin 1	V ₊	
Pin 2	P-Signal	0 V / GND
Pin 3	n.c	P-Signal
Pin 4 / GND	n.c	

IP 65



DT04-3P

A	V_+				
B	n.c.	P-Signal			
C	P-Signal	0 V / GND			

IP 65



Junior Timer

Pin 1	P-Signal	0 V / GND
Pin 2	n.c	P-Signal
Pin 3	V ₊	

IP 65



Cable

Bn	V_+				
Black	P-Signal				
Blue	n.c.	0 V / GND			


IP 69K




SCP03 pressure sensor

Pin assignment


SCP03-...-07
M12 4P





SCP03-...-06
DIN EN 175301-803
Form A




SCP03-...-0D
DT04 4P




SCP03-...-0E
DT04 3P

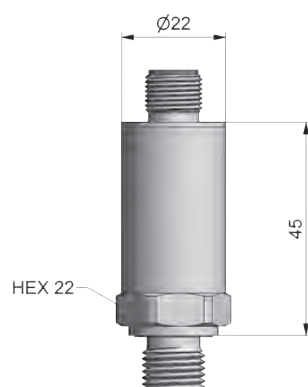


SCP03-...-0A
Superseal




SCP03-...-0J
Junior Timer 3P




SCP03-...-00
Cable

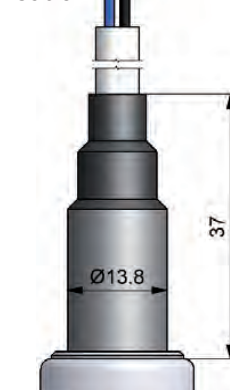


SCP03-xxx-x4-0x
G 1/4, DIN 3852 T 11 (Form E)

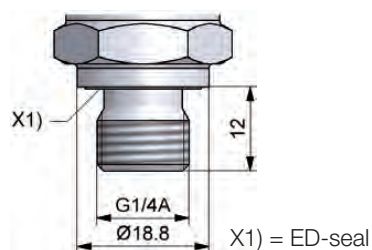


SCP03-xxx-x8-0x
G 1/4 O-ring

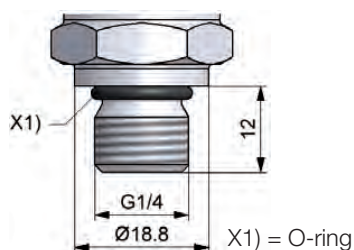


SCP03-xxx-x5-0x
1/4 NPT



SCP03-xxx-x6-0x
SAE 06 - O-ring

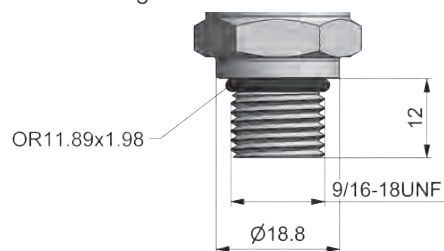

SCP03-xxx-x7-0x
SAE 04 - O-ring

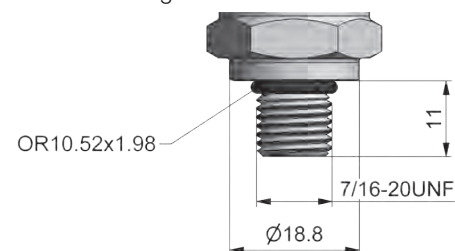

SCP03 pressure sensor

Order code

Pressure sensor SCP03

Pressure range

-1...3 bar	004R
-1...9 bar	010R
-1...15 bar	016R
-1...24 bar	025R
0...4 bar	004
0...10 bar	010
0...16 bar	016
0...25 bar	025
0...35 bar	035
0...60 bar	060
0...100 bar	100
0...160 bar	160
0...250 bar	250
0...400 bar	400
0...500 bar	500
0...600 bar	600
0...1000 bar	1000
0...150 psi	0150P
0...250 psi	0250P
0...1000 psi	1000P
0...3000 psi	3000P
0...5000 psi	5000P
0...9000 psi	9000P

Output signal

0...20 mA	1
4...20 mA (3-wire)	2
4...20 mA (2-wire)	3
0...10 V	4
0...5 V	A
1...6 V	B
0.5...4.5 V (ratiometric)	R
0.5...4.5 V (nom.)	S

Process connection

G1/4 BSPP	4
1/4 NPT (P _n max. = 600 bar)	5
9/16-18 UNF, SAE 6 O-ring (P _n max. = 400 bar)	6
7/16-20 UNF SAE-4 O-ring (P _n max. = 400 bar)	7
G1/4 O-ring (P _n max. = 600 bar)	8

Damping

Without damping	O
With damping	D

Connecting plug

Device connector DIN EN 175301-803 Form A 4-pole	6
Circular connector M12x1 4-pole	7
Stationary cable 2 m	0
Device plug AMP Superseal	A
Device plug DT04 4 pole	D
Device plug DT04 3 pole	E
Junior Timer 3-pole	J

Order quantity

Minimum order qty:

Q8: Multiple of 50 pcs.

Available single versions

Pressure sensor SCP03 Industrial

Pressure range

0...10 bar	010
0...25 bar	025
0...60 bar	060
0...250 bar	250
0...400 bar	400
0...600 bar	600

Output signal

4...20 mA (3-wire)	2
4...20 mA (2-wire)	3
0...10 V	4

Process connection

G1/4 BSPP	4
-----------	---

Connecting plug

Device connector DIN EN 175301-803 Form A 4-pole	6
Circular connector M12x1 4-pole	7

Pressure sensor SCP03 Mobile

Pressure range

0...10 bar	010
0...25 bar	025
0...60 bar	060
0...250 bar	250
0...400 bar	400
0...600 bar	600

Output signal

4...20 mA (2-wire)	3
0.5...4.5 V (ratiometric)	R

Process connection

G1/4 BSPP	4
-----------	---

Connecting plug

Device plug DT04 4 pole	D
-------------------------	---

Order example

150x SCP03-400-34-07Q8

150 Single sensors (multiple of 50's)

Pressure range 0...400 bar

Output signal 4 to 20 mA (2-wire)

G1/4 BSPP

Without damping

M12 connecting plug 4-pole

